


Selecting the correct size H-Series heater

For Your Swimming Pool

Determine your pool's surface area in square feet:

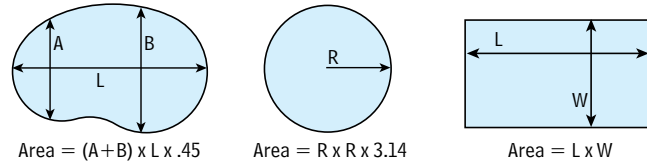

MODEL	SURFACE AREA
H400	1,200
H350	1,050
H300	900
H250	750
H200	600
H150	450

In this table, locate the surface area that is equal to or just greater than the pool's surface area. To the left of this number is the appropriate H-Series model that will fit the selected area.

For indoor pool installations, divide the pool's surface area by 3.

Table is based on a 30°F temperature rise, 3½ mph average wind velocity and elevation of up to 2,000 feet above sea level.

For Your Spa or Hot Tub

Determine your spa capacity in gallons (surface area x average depth x 7½).

The reference table lists the time required in minutes to raise the temperature of the spa/hot tub by 30°F. In the table below, locate the column with the spa/tub size in gallons that is closest to yours. Select the desired time to raise the spa/hot tub temperature 30°F, read to the left and select the appropriate H-Series model.

This guide can be adjusted for other temperature rises. For example, if you desire a 15°F increase in temperature, simply divide the time for 30°F rise by the ratio of 30/15, or 2.

Note: Heat lost and/or heat absorbed by spa walls or other objects will add to the time it takes the spa to heat up.

Spa sizing is based on an insulated and covered spa. Always cover your spa or hot tub when not in use to minimize heat loss and evaporation.

MODEL	SPA/TUB SIZE IN GALLONS								
	200	300	400	500	600	700	800	900	1,000
	Time in Minutes to Raise Spa/Tub Temperature 30°F								
H400	9	14	19	23	28	33	37	42	47
H350	11	16	21	27	32	37	43	48	54
H300	1	19	25	31	37	44	50	56	62
H250	15	22	30	37	45	52	60	67	75
H200	19	28	37	47	56	66	75	84	94
H150	25	37	50	62	75	87	100	112	125

Specifications and Dimensions

Universal H-Series Heater

	H400FD	H350FD	H300FD
BTU/Hr.	400,000	350,000	250,000
Width	36"	33"	28"
Depth	29½"	29½"	29½"
Height	24"	24"	24"
Water Connections	2" x 2½"	2" x 2½"	2" x 2½"
Flue Outlet Diameter	8"	8"	7"
Flue Pipe Diameter	9"	9"	7"
DHI Stack Height	36¾"	36¾"	33¾"
Heater Weight (lbs.)	160	158	134
Gas Connection at Heater	¾"	¾"	¾"

Electronic and Millivolt Heaters

	H400	H350	H300	H250	H200	H150
BTU/Hr.	400,000	350,000	300,000	250,000	200,000	150,000
Width	35¼"	32½"	29¾"	27"	24½"	21½"
Depth	27½"	27½"	27½"	27½"	27½"	27½"
Height	28½"	28½"	28½"	28½"	28½"	28½"
Water Connections	1½" x 2"	1½" x 2"	1½" x 2"	1½" x 2"	1½" x 2"	1½" x 2"
Flue Outlet Diameter	9"	9"	8"	7"	7"	6"
Flue Pipe Diameter	10"	10"	9"	7"	7"	6"
HWS Stack Height	19½"	17½"	17¼"	17¼"	15¼"	14"
Heater Weight (lbs.)	200	185	157	144	141	131
Gas Connection at Heater	¾"	¾"	¾"	¾"	¾"	¾"

H-Series heaters are available in a comprehensive range of BTU sizes for natural or propane gas. All units are certified by the Canadian Standards Association and carry Hayward's exclusive warranty.

Efficiency. Performance. Innovation.

For pure comfort in ideal water temperatures, count on the control and efficiency of H-Series heaters – the perfect high-quality addition to your Totally Hayward® System.



Right for so many reasons.
Perfect for so many applications.

Pumps

Filters

Heaters

Heat Pumps

Cleaners

Lighting

Controls

Electronic Chlorine Generators

Total System



Exclusive to Universal H-Series Heater

Superior Hydraulic Performance
Industry-leading hydraulic performance saves energy by reducing circulation pump run time.



Hot-Surface Silicon Nitride Ignition System
Exclusive silicon nitride ignition system for dependable lighting and reliable operation.



Low NOx Emissions
Environmentally responsible; complies with all current California and Texas air quality emission standards. Industry-leading 82%-84% thermal efficiency.




Dual Voltage
Installation is simplified with voltage that adapts to either 110V or 220V.




Additional Features*

Cupro Nickel Heat Exchanger
With Totally Managed Flow provides exceptional corrosion resistance and erosion protection. Ideal for today's salt-based electronic chlorination systems.



State-of-the-Art Finn Plate™ Heat Exchanger
State-of-the-art Finn Plate™ heat exchanger with special V-groove design for faster heating and longer life.



Insulated Fire Tile® Combustion Chamber
Unlike older forms of insulation, Fire Tile securely traps the heat, delivering the most performance from each BTU.



Digital LED Control Panel
Electronic control/display maintains water temperature; monitors heater performance with self-diagnostic capability. (Universal and Electronic models only)



Patented Rust-Resistant Water Path
An injection-molded polymer header provides extended life and simple installation. (Electronic and Millivolt models only)



Hayward Universal H-Series Heater: Energy-efficient and universal fit for added convenience.

Hayward is always looking for ways to make pool and spa ownership as simple and effortless as possible. The latest example of this is the new Universal H-Series pool and spa heater. Combining advanced technology with universal-fit flexibility, it's a smart choice for virtually any new installation or existing system upgrade — delivering state-of-the-industry performance, outstanding energy efficiency, extremely low NOx emission levels and Hayward's legendary durability and reliability. Offered in 250,000, 350,000 and 400,000 BTU/hr. inputs.

Easy installation, simple operation.

A choice of left-side or right-side electric, gas and water connections gives Universal H-Series heaters unprecedented installation flexibility. This enhanced adaptability — coupled with lightweight design, modern low-profile appearance and only front-panel access required for installation and service — ensures compatibility with virtually all new or existing systems and equipment pad conditions.



H-Series Electronic and Millivolt Heaters: As high in performance and efficiency as they are low in maintenance and cost.



Electronic Heaters
The advanced direct-spark technology and outstanding dependability of Hayward electronic H-Series heaters let you warm up your pool or

spa and still keep your fuel costs down. Other performance- and efficiency-enhancing features include stainless steel burners, corrosion-resistant Finn Plate heat exchangers with Cupro nickel, and Fire Tile combustion chambers. Choose from propane or natural gas operation, in models ranging from 150,000-BTU input to 400,000-BTU input.



Millivolt Heaters
Although designed for budget-conscious applications, Hayward H-Series Millivolt heaters deliver uncompromising

performance and economy. A standing pilot ignition system ensures reliable lighting, and — like all H-Series heaters — they feature a Finn Plate heat exchanger and Fire Tile combustion chamber. Available in your choice of propane or natural gas models, with input capacity from 150,000 to 400,000 BTU.

*Available on all models unless otherwise noted.